




▶▶▶ **Earthing Enhancement Material**



Manufacturer Head Office:

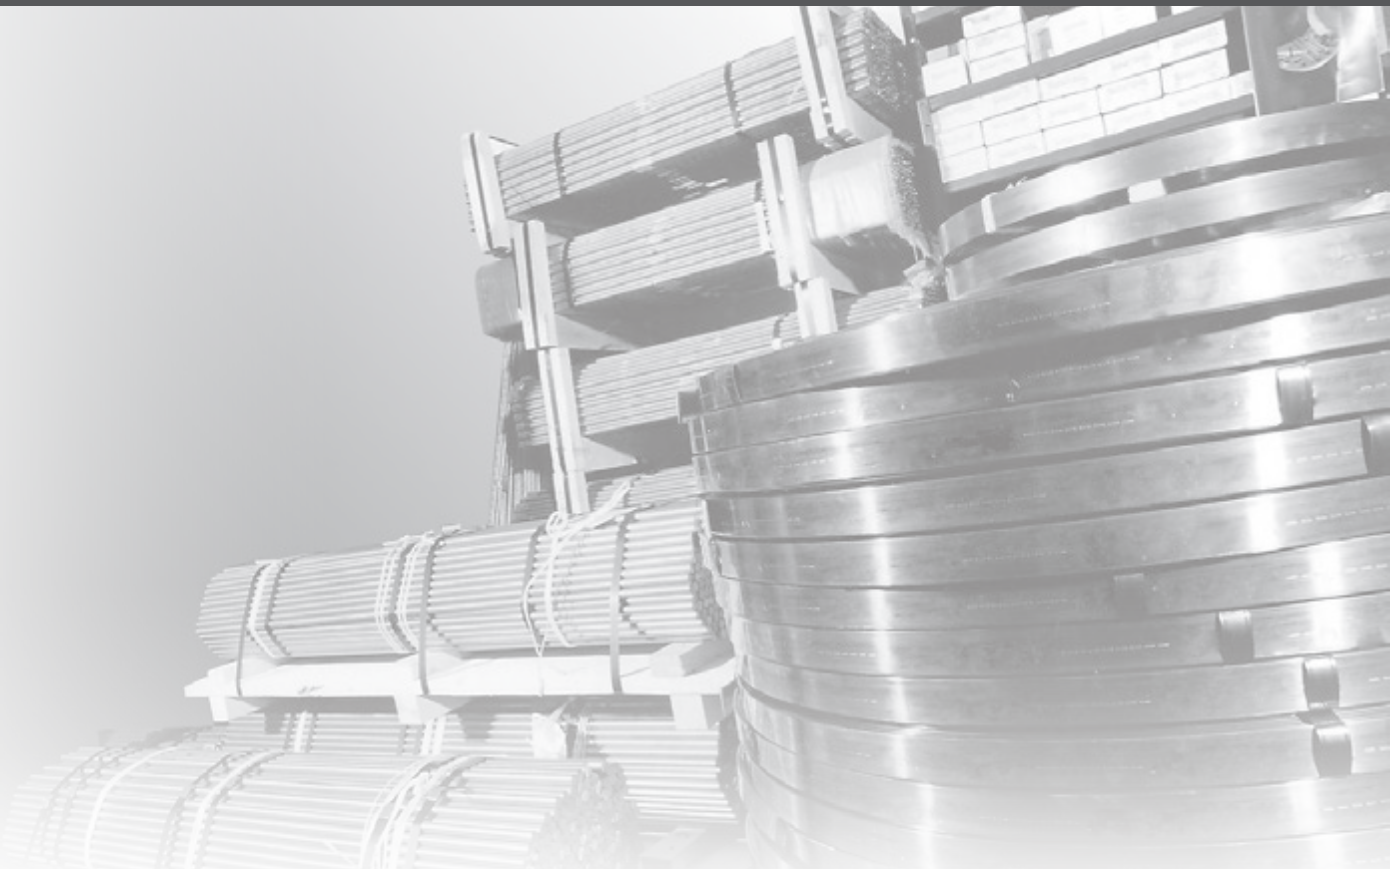

Email: sales@lytech.uk | marketing@lytech.uk
Website: www.lytech.uk



Certificate of Registration

QUALITY MANAGEMENT SYSTEM - ISO 9001:2015

This is to certify that:

Lytech Technologies Pte Ltd
51 Ubi Avenue 1
#05-22 Paya Ubi Industrial Building
Singapore 408933

Holds Certificate No:

FM 665172

and operates a Quality Management System which complies with the requirements of ISO 9001:2015 for the following scope:

The design, manufacture & sales of lightning and earthing materials

For and on behalf of BSI:

Chris Cheung, Head of Compliance & Risk - Asia Pacific

Original Registration Date: 2017-01-14

Latest Revision Date: 2020-11-03

Effective Date: 2020-01-14

Expiry Date: 2023-01-13

Page: 1 of 1



...making excellence a habit.™

This certificate was issued electronically and remains the property of BSI and is bound by the conditions of contract.

An electronic certificate can be authenticated [online](#).

Printed copies can be validated at www.bsi-global.com/ClientDirectory or telephone +(65)62700777.

Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2015 requirements may be obtained by consulting the organization.

This certificate is valid only if provided original copies are in complete set.

Information and Contact: BSI, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP. Tel: + 44 345 080 9000
BSI Assurance UK Limited, registered in England under number 7805321 at 389 Chiswick High Road, London W4 4AL, UK.
A Member of the BSI Group of Companies.



Features

- Effective in all soil conditions.
- No maintenance required.
- Cost Effective in reduction of earth resistance.



IEC 62561-7:2011

Product Description

Ordering Code

EEM - 10

Description:

Resistance Lowering Compound

Application:

To lower the DC ground resistance & impedance

Weight:

10kg

Ordering Code

EEM - 25

Description:

Resistance Lowering Compound

Application:

To lower the DC ground resistance & impedance

Weight:

25kg

The requirement for a low resistance is extremely important with the installation of any earthing system. **LYTECH EEM** provides the ability to dramatically reduce soil resistivity even in soils with average electrical conductivity.

LYTECH EEM comprises specifically selected compounds, which possess excellent electrical conductivity. When EEM is mixed with water and poured around the earthing system and surrounding soil the powder and water react to form a hardened mass within an earthing system. EEM will not washaway under seasonal conditions and therefore provides a permanent presence in working to improve and maintain the integrity of an earthing system. Given that does not wash away the requirement to re-treat the soil as is the case with other enhancing compounds is eliminated.



Product Application


Given that all earthing systems are installed in varying soil types and conditions, it will be appreciated that the application results of EEM will also be dependant on these site-specific conditions. For a typical trench installation, one 10Kg kit of EEM will achieve the desired earth resistance levels in combination with appropriate conductors for a trench covering 200mm in length x 300mm in width and a depth of 300mm.

All earthing systems are typically required to achieve a Ground DC Resistance of < 10 Ohms and impedance of < 30 Ohms as outlined in most standards.

If installing either a radial earthing system or grid type earthing system, it is recommended that all earthing conductors be installed at a depth of between 500mm and 750mm (recommended) with a maximum depth of 1000mm. In order to further assist in improving the earth resistance of the system, it is recommended that excavated soil of poor quality (Rocky) be replaced with soil of a good quality (Garden Loam) prior to backfilling the trench.

We are pleased to offer our services to our clients. Just email to us your enquiries at sales@lytech.uk

Recommended Bags of EEM-10 Required For Refilling Typical Trench Installations

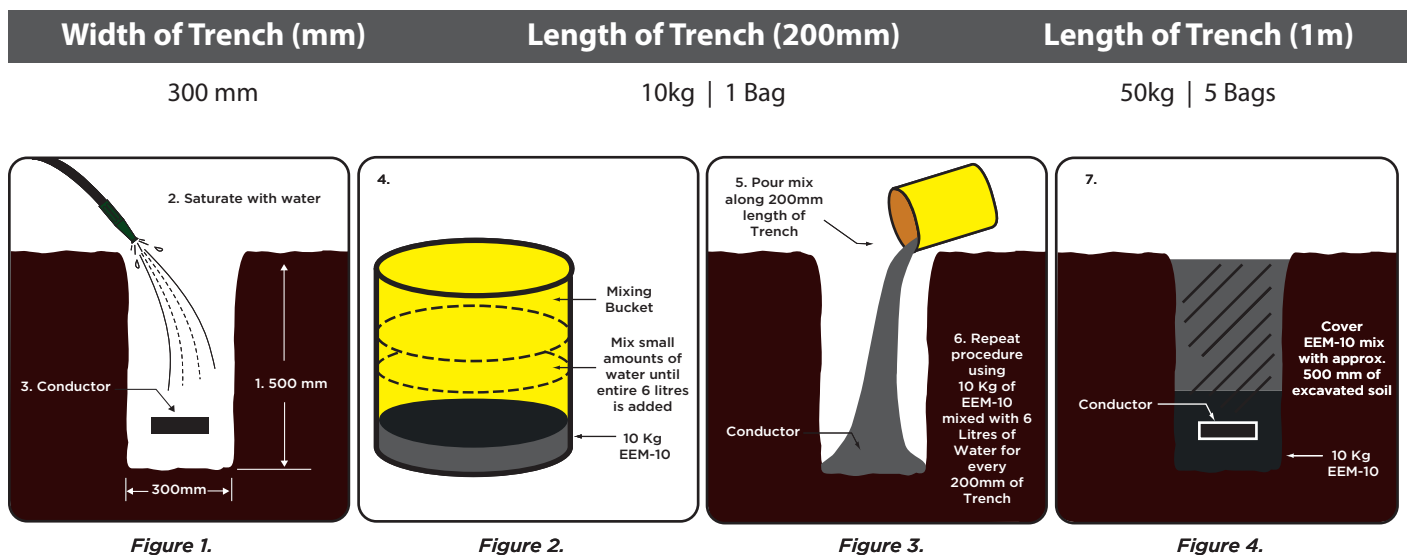

For trench dimensions outside of the given specifications please contact LYTECH Technologies or an authorised supplier for further advice.

Trench Installation

The application of EEM-10 (10kg) to a typical earthing system installed in a trench, which consists of rods, tapes or cables, involves the subsequent steps.

1. Dig a trench to the suggested dimensions as detailed in the attached drawings.
2. Soak the whole area by dousing with water.

Continue next page ---

▶▶▶ Earthing Enhancement Material

Recommended Bags of EEM-10 Required For Refilling Typical Trench Installations

- Place all rods, tapes or cables into position as required.
- Mix 10kg of EEM-10 with 6 litres of water adding only a little at a time at the start to ensure a paste like consistency then gradually making the mix thinner with the addition of small amounts of water until the entire 6 litres is added (***NOTE: Avoid large lumps in the mix that become hard to dissolve by only adding a minium of water until a smooth paste is created after which water can be added in larger portions.**) The mixing of EEM-10 and water is best done in a cement mixer or in a wheelbarrow or large bin with the aid of a mixing rod or mechanical agitator to correctly mix the water and the EEM-10.
- Immediately pour mix directly onto 200mm of earthing system.
- Repeat steps 4 & 5 for every additional 200mm length of earthing until entire trench has been applied with EEM.
- Backfill the remainder of the trench with the excavated soil.

***Note: If the unearthed soil is of poor quality eg. clay rock or shale, it should not be used and garden loam or sand should be used as a replacement.**

Suggested Bags Of EEM-10 Necessary For Backfilling Earth Rod Installation

Dia. of Hole (mm)	Depth of Hole (mm) 1800mm	Depth of Hole (mm) 2400mm	Depth of Hole (mm) 3600mm
200mm	30kg 3 Bags	40kg 4 Bags	60kg 6 Bags

<p>2. Saturate with water</p> <p>1. Auger 75mm dia. Hole to a depth of 150 mm less than length of Rod.</p> <p>3. Place the Rod in position and drive the Rod 300 mm into the soil.</p> <p>150 mm</p> <p>300 mm</p> <p>75 mm</p> <p>Earth Rod</p>	<p>4. Mixing Bucket</p> <p>Add small amounts of water until entire 6 litres is added</p> <p>10 Kg EEM-10</p>	<p>5. Pour mix around hole and Earth Rod</p> <p>6. Repeat using 10 Kg of EEM-10 mixed with 6 litres of water in accordance with recommended number of applications as per the attached table</p> <p>Earth Rod</p>	<p>7. Backfill remainder of hole with excavated soil.</p> <p>Earth Rod</p>
Figure 1.	Figure 2.	Figure 3.	Figure 4.

For augured hole dimensions outside of the given specifications, please contact LYTECH Technologies or an approved distributor for further advice.

Earth Rod Installation

The application of EEM-10 (10 Kg) for a driven earth rod involves the following steps:

1. Drill or auger a 75mm (approx.) diameter hole to a depth of 150mm less than the length of the rod to be installed.
2. Soak the hole by dousing with water.
3. Place the earth rod into a central position in the hole and drive the rod 300mm if possible into the soil at the bottom of the hole. The top section of the earth rod should now be approximately 150mm below the lip of the hole. If required make all LYTECH Exothermic Welding connections to the earth rod at this time.
4. Mix 10kg of EEM-10 with 6 litres of water adding only a little at a time at the start to ensure a paste like evenness then slowly making the mix thinner with the addition of small amounts of water until the entire 6 litres is added (***NOTE: Avoid large lumps in the mix that become hard to dissolve by only adding a minium of water until a smooth paste is created after which water can be added in larger portions.**) The mixing of EEM-10 and water is best done in a cement mixer or in a wheelbarrow or large bin with the aid of a mixing rod or mechanical agitator to properly mix the water and the EEM-10.
5. Instantly pour mix directly into augured hole.
6. Repeat steps 4 and 5 in accordance with suggested number of applications of EEM-10 as per the attached table.
7. Backfill the remainder of the hole with the excavated soil.

Authorised Distributor:



The content of this catalogue has been carefully checked for accuracy at the time of print. However, LYTECH Technologies doesn't give any warranty of any kind, express or implied, in this respect and shall not be liable for any loss or damage that may result from any use or as a consequence of any inaccuracies in or any omissions from the information which it may contain.

Copyright © 2020 LYTECH Technologies Copyright in these pages is owned by LYTECH Technologies except where otherwise indicated. No part of this publication may be reproduced, copied or transmitted in any form or by any means, without our prior written permission. Images, trademarks, brands, designs and technology are also protected by other intellectual property rights and may not be reproduced or appropriated in any manner without written permission of their respective owners. LYTECH Technologies reserves the right to change and improve any product specifications or other mentions in the catalogue at its own discretion and at any time. These conditions of use are governed by the laws of Singapore and the courts of Singapore shall have exclusive jurisdiction in any dispute.

LYTECH Technologies Ltd

85 Great Portland Street, London W1W 7LT

Tel: +44 20 3745 0614 | **Fax:** +44 20 7183 3073 | **Email:** marketing@lytech.uk | **Website:** www.lytech.uk

LYTECH Technologies Pte Ltd

51 Ubi Avenue 1, #05-22 Paya Ubi Industrial Park, Singapore 408933

Tel: +65 6741 9108 | **Fax:** +65 6749 3244 | **Email:** sales@lytech.uk | **Website:** www.lytech.uk